

LED INGROUNDS

Ingress-protected inground fixtures, ranging from recessed marker lights to impressive up lights, the inground range has the tool to take on those projects where a recessed solution is required.





AVAILABLE COLOURS



S/STEEL

COLOUR SOURCE 1

CC LED INGROUND

The CS1 might be small, but it is powerful.

One high performance LED thermally managed and housed in a precision engineered IP67 rated anodised aluminium housing.

With 316 stainless steel bezel, this fitting is perfect for step illumination inside or out.

Product Code: CS1-IGM- R / G / B / A / CW / NW / WW


TECHNICAL SPECIFICATIONS

Channels **1Ch**
 Wattage **1.2W**
 IP Rating **IP67**
 LED Type **Single Colour**
 Housing Cut Out **32mmØ**
 LED Connection **2 Core**
 Housing **Anodised Aluminium**
 Bezel **316 Stainless Steel**
 Lumen Output **67lm[R], 120lm[G], 29lm[B], 73lm[A], 154lm[CW], 146lm [WW]**
 Operating Temp Range **-20 to 50 °C**

OPTIONS


Polycarbonate **Clear [8°/25°]**
 Polycarbonate **Frosted**

DIMENSIONS

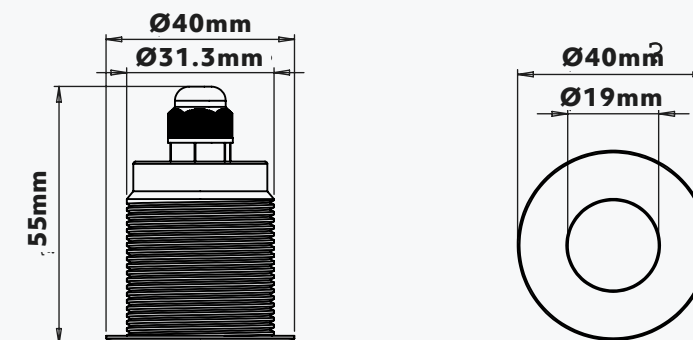

? ?

SINGLE COLOUR OPTIONS

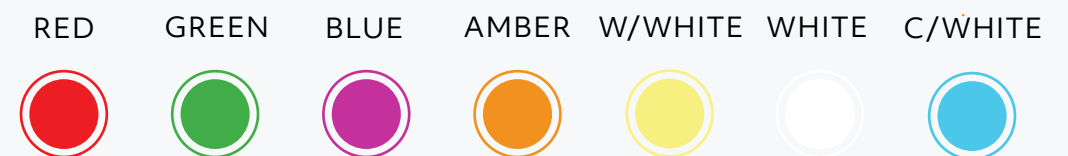


CS1 INGROUND

Outdoor Decking
Installation.

IP67



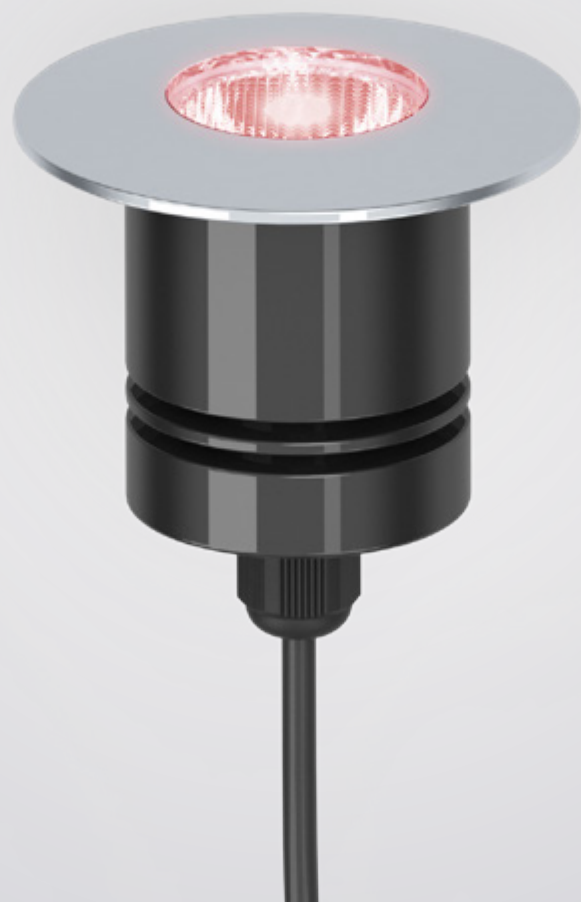

AVAILABLE COLOURS



S/STEEL

COLOUR SOURCE 4 CC LED INGROUND

Our CS4 Inground encases the same technology of our popular Colour Source 4 downlights into an IP67 rated anodised aluminium housing with 316 stainless steel bezel.

Perfect for external deck lighting.


Product Code: CS4-IGM- RGBW / RGBA

Compatible With : LUD 48 , LUD 192

TECHNICAL SPECIFICATIONS

- Channels **4Ch**
- Wattage **4.8W**
- Input Current **350mA**
- IP Rating **IP67**
- LED Type **RGBW**
- Housing Cut Out **45mmØ**
- Lens Options **15°/25°/40°**
- LED Connection **RJ45**
- Lumen Output **284lm [RGBW] / 227lm [RGBA]**
- Operating Temp Range **-20 to 50 °C**

DIMENSIONS

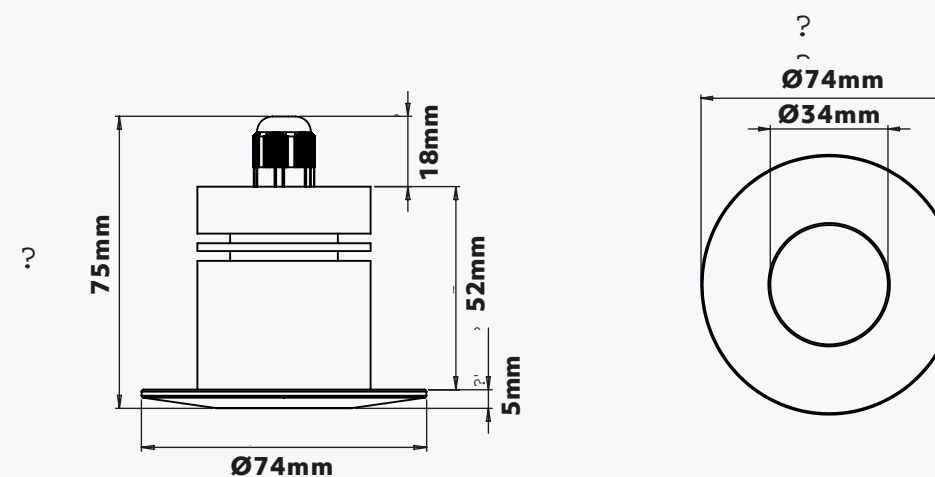

OPTIONAL LENSES



- Our lens options are:
- 15° : Narrow Beam Angle**
 - 25° : Medium Beam Angle**
 - 40° : Wide Beam Angle**

CS4 INGROUND

Outdoor Decking
Installation.

IP67





AVAILABLE COLOURS



WHITE GREY BLACK

TILT COLOUR SOURCE 16

CC LED INGROUND

This Inground encases the same technology of our powerful Colour Source 16 downlights into an IP67 recessed inground housing with a stainless steel bezel.

Perfect for external applications where a powerful wash is required.

Product Code: CS16-TIG- RGBW / RGBA

Compatible With : LUD 48 , LUD 192


TECHNICAL SPECIFICATIONS

Channels **4Ch**
 Wattage **19.2W**
 Input Current **350mA**
 IP Rating **IP67**
 LED Type **RGBW**
 Housing Cut Out **170(D) x 149(W)mmØ**
 Lens Options **15°/25°/40°**
 LED Connection **RJ45**
 Lumen Output **1,136lm [RGBW] / 908lm [RGBA]**
 Operating Temp Range **-20 to 50 °C**

OPTIONAL ACCESSORIES

T-Piece Connector **RJ45**

DIMENSIONS

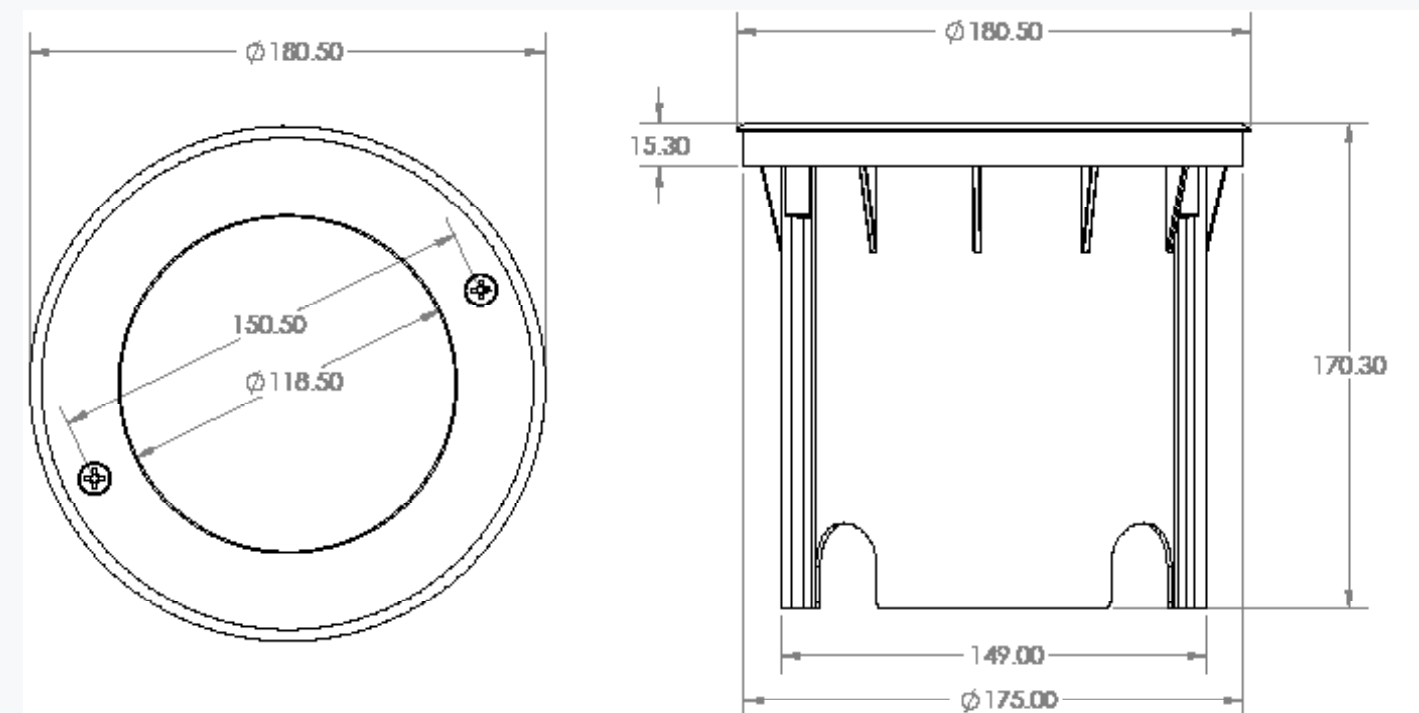

CS16 INGROUND

Outdoor Decking
Installation.

IP67

