



sales@abstract.co.uk www.abstract.co.uk T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm

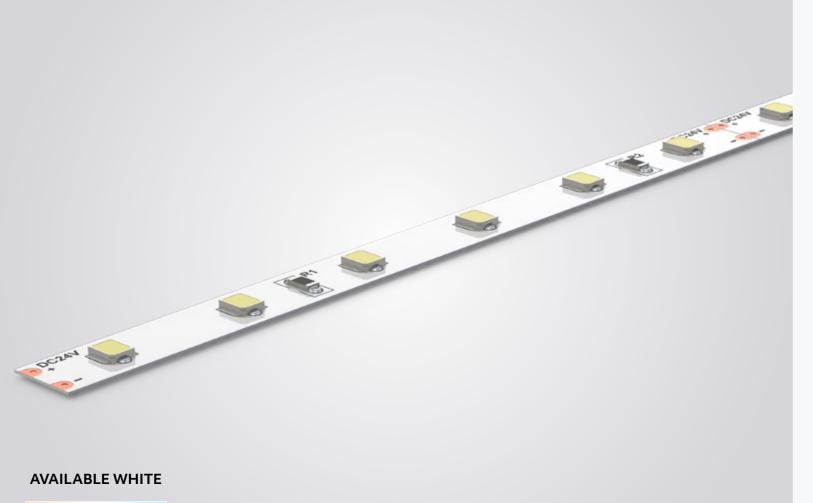

3000k 6000k

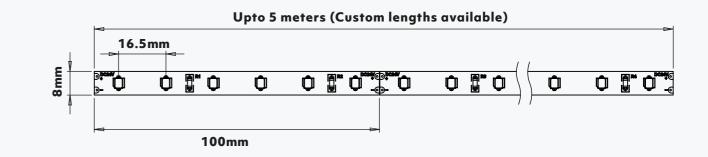

LED TECHNOLOGY

FLEXIBLE ULTRA POWER WHITE 12W CV LED FLEXIBLE STRIP


Cuttable, stickable, reliable, ultra power White flexible LED with 60 high efficiency LEDs per meter will provide an ultra bright and uniformed linear White light.

Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: MF-UP- WW / NW / CW - [IP]

SMD2835 WHITE LED

The SMD2835 is the most efficient White SMD technology, with a higher lumen output per watt and unrivalled epistar quality,

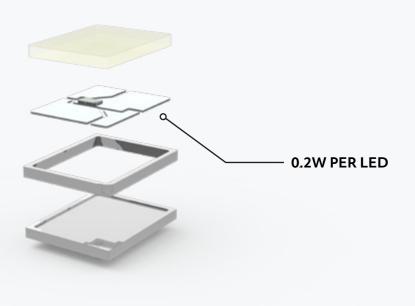


sales@abstract.co.uk www.abstract.co.uk T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm

TECHNICAL SPECIFICATIONS

Voltage 24V LED's Per Meter 60 LED Type SMD2835 Power Consumption 12W/M Channels 1Ch [WW] [NW] [CW] IP Rating IP20 Cutting Points 100mm Lumen Output 1,608lm/M[WW], 1,680lm/M [NW], 1,608lm/M [CW]

Operating Temp Range -20 to 50 °C


DIMENSIONS

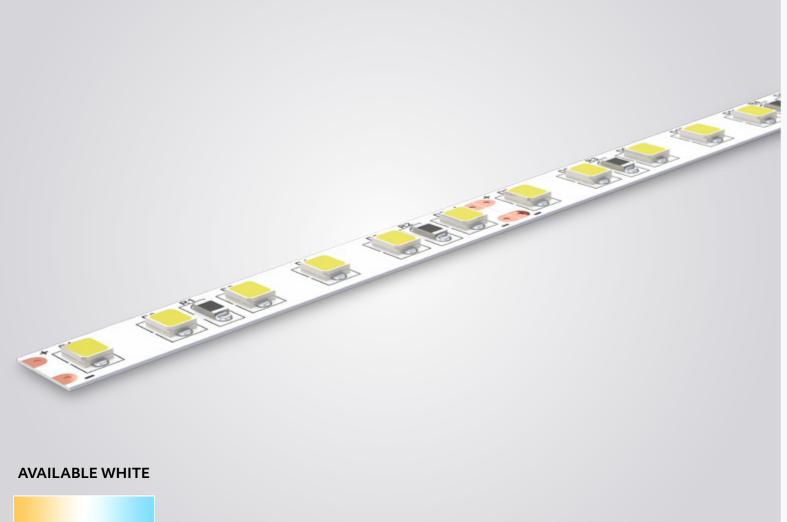

TECHNICAL SPECIFICATIONS

LED's Per Meter120 LED Type SMD2835 Power Consumption 24W/M Channels 1Ch [WW] [NW] [CW] IP Rating IP20 Cutting Points **50mm** Lumen Output 3,216lm/M[WW], 3,360lm/M [NW], 3,216lm/M [CW] Operating Temp Range -20 to 50 °C

DIMENSIONS

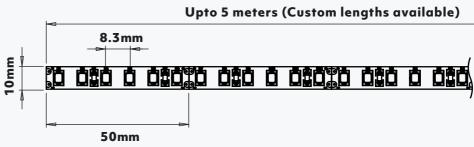

6000k

3000k

FLEXIBLE ULTRA POWER WHITE 24W CV LED FLEXIBLE STRIP

Cuttable, stickable, reliable, ultra power White flexible LED with 120 high efficiency LEDs per meter will provide an ultra bright and uniformed linear White light.


Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: MF-UP120- WW / NW / CW - [IP]

LED TECHNOLOGY

SMD2835 WHITE LED

The SMD2835 is the most efficient White SMD technology, with a higher lumen output per watt and unrivalled epistar quality,

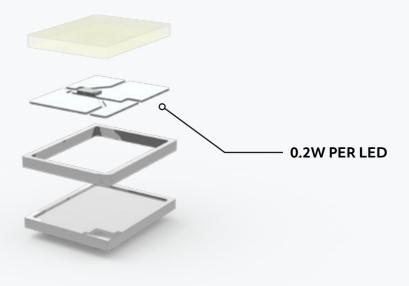

sales@abstract.co.uk www.abstract.co.uk T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm Voltage 24V

AVAILABLE WHITE

6000k


3000k

AVAILABLE IN IP67 SLEEVING



Voltage 24V LED's Per Meter 840 LED Type COB Chip On Board Power Consumption 18W/M Channels 1Ch (Single colour) 3Ch (RGB) 4Ch (RGBW) IP Rating IP33 Cutting Points 45mm Operating Temp Range -20 to 50 °C

DIMENSIONS

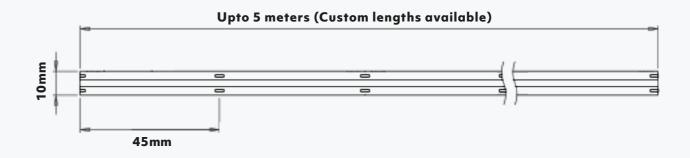

COLOURS

COB LED STRIP 18W CV LED FLEXIBLE STRIP

AVAILABLE COLOUR MIX


Cuttable, stickable, reliable, spotless flexible LED with high density COB tech-nology, will provide an ultra bright and continuous line of light.


Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: SF-MP- WW / NW / CW / R / G / B / A / P - [IP] SF-COB-RGB / RGBW

> sales@abstract.co.uk www.abstract.co.uk

T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm

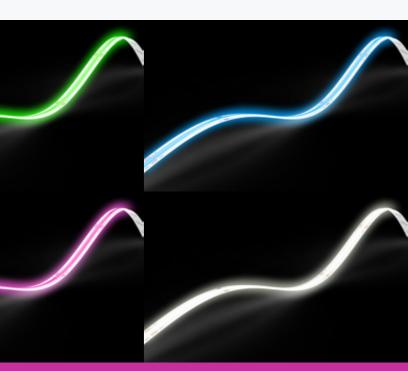


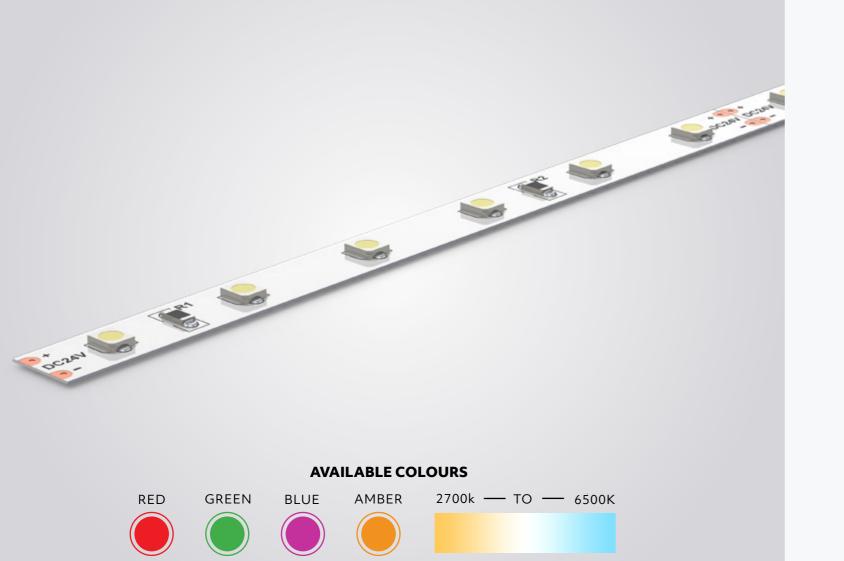

TECHNICAL SPECIFICATIONS

Voltage 24V LED's Per Meter 60 LED Type SMD5050 Power Consumption 14.4W/M Channels 1Ch [R] [G] [B] [A] [2700K-6500K] IP Rating IP20 Cutting Points 100mm Operating Temp Range -20° to 50 °C

DIMENSIONS

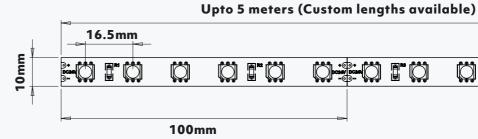

FLEXIBLE HIGH POWER SINGLE 14.4W CV LED FLEXIBLE STRIP

Cuttable, stickable, reliable, high power single colour flexible LED with 60 high power LEDs per meter will provide a bright and uniformed linear light.

Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: MF-HP- R / G / B / A / WW / NW / CW - [IP]






sales@abstract.co.uk www.abstract.co.uk T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm

LED TECHNOLOGY




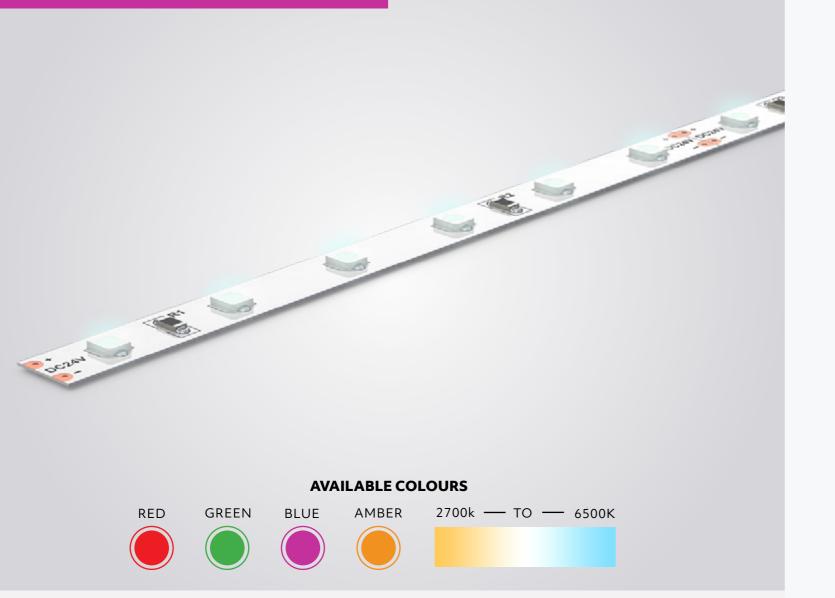

TECHNICAL SPECIFICATIONS

Voltage 24V LED's Per Meter 60 LED Type SMD3528 Power Consumption 4.8W/M Channels 1Ch [R] [G] [B] [A] [2700K-6500K] IP Rating IP20 Cutting Points 100mm Operating Temp Range -20° to 50 °C

DIMENSIONS

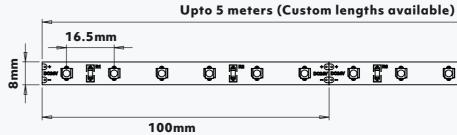

FLEXIBLE STANDARD POWER 4.8W CV LED FLEXIBLE STRIP

Cuttable, stickable, reliable, standard power single colour flexible LED with 60 LEDs per meter, is perfect to achieve a subtle glow to define an area or feature.

Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: MF-SP- R/G/B/A/WW/NW/CW-[IP]

LED TECHNOLOGY



sales@abstract.co.uk www.abstract.co.uk

74

Ô 🕻 Ô Ô Ô,

0.08W PER LED


AVAILABLE IN IP67 SLEEVING COLOUR CHANGING TAPE - RGBW HIGH POWER



TECHNICAL SPECIFICATIONS

Voltage 24V LED's Per Meter 60 LED Type SMD5050 Power Consumption 19.2W/M Channels 4Ch (RGB[W]) IP Rating IP20 Cutting Points 100mm Lumen Output 1,440lm/M [RGBW]


DIMENSIONS

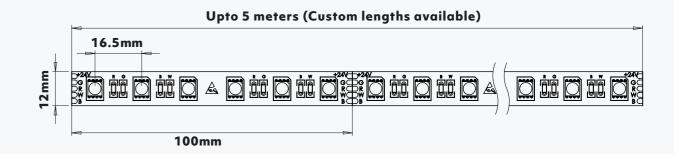

LED TECHNOLOGY

SMD5050 RGBW LED

Utilising brand new 4 channel mix-at-source technology this RGBW chip is the most powerful yet.

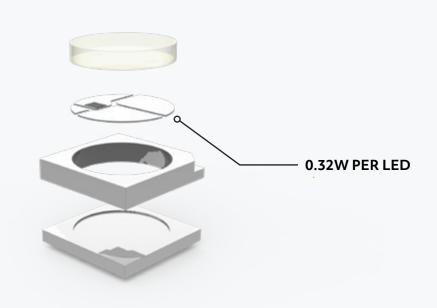


CV LED FLEXIBLE STRIP

Cuttable, stickable, reliable, high power colour changing flexible LED with dedicated White. Perfect for vivid colour mixes with 60 LEDs per meter for a bright and uniformed linear output.


FLEXIBLE RGBW LED TAPE 19.2W/M

Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: QF-HP-RGBW - [IP]



Operating Temp Range -20 to 50°C

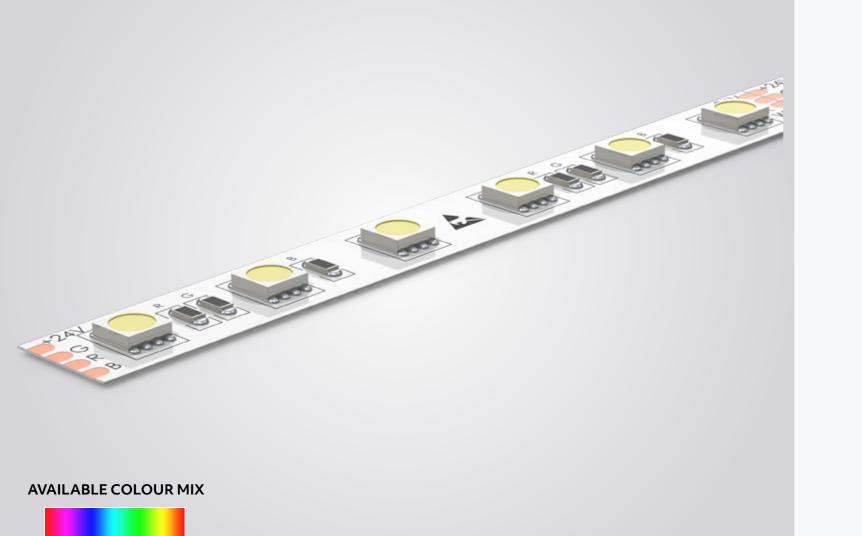

FLEXIBLE RGB LED TAPE 14.4W/M CV LED FLEXIBLE STRIP

Cuttable, stickable, reliable, high power colour changing flexible LED, perfect for vivid colour mixes with 60 LEDs per meter for a bright and uniformed linear output.


Designed for ease of installation and for peace of mind with high reliability as a must.

Product Code: TF-HP-RGB - [IP]

TECHNICAL SPECIFICATIONS

Voltage 24V LED's Per Meter 60 LED Type SMD5050 Power Consumption 14.4W/M Channels 3Ch (RGB) IP Rating IP20 Cutting Points 100mm Lumen Output 980lm/M [RGB]


DIMENSIONS

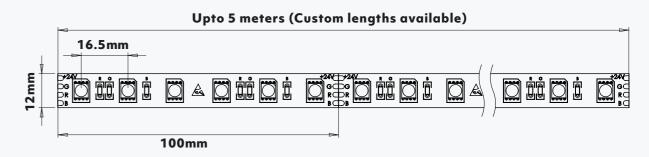

LED TECHNOLOGY

SMD5050 RGB LED

High quality epistar LED chip, with high output and vivd colour rendering.

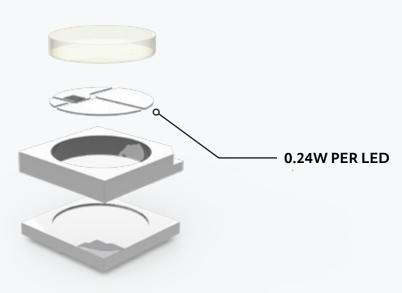

sales@abstract.co.uk www.abstract.co.uk

T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm Operating Temp Range -20 to 50°C