
XLITE PRO

TECHNICAL SPECIFICATIONS

Channels **Pixel controlled** Wattage **30W** Input Current Constant Voltage **5V** IP Rating IP20 LED Type **RGBW** Housing 35mm Lens Options 160° Frost LED Connection 4 PIN XLR Lumen Output 300lm Operating Temp Range -20 to 50 °C Height 2000mm LED lite length 1950mm LED Pitch 14.2mm

DIMENSIONS

- - 30Ømm 2050mm

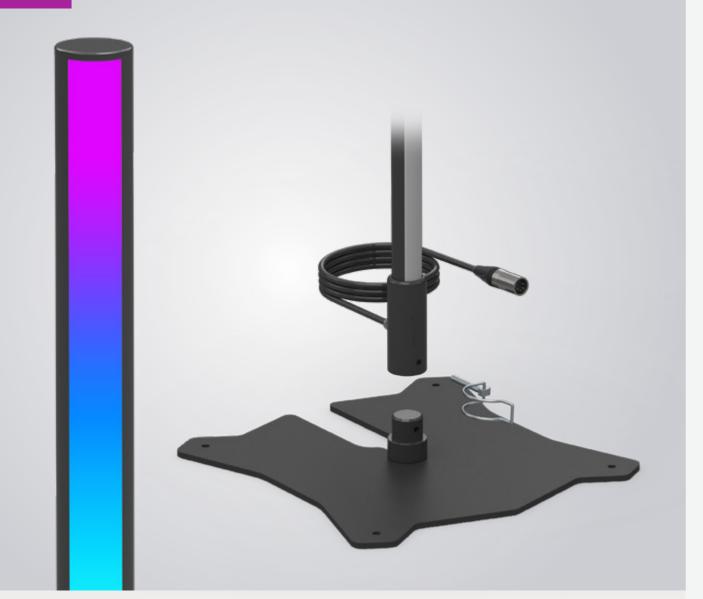

XLITE PRO XLITE PRO Freestanding Pole 2M

The XLite sets the bar for lighting excellence, with a high performance mix-at-source multi-chip LED housed in a precision engineered anodised aluminium housing.

The lighting enthusiasts freestanding pole of choice.

Product Code: XLITEPRO

Compatible With : XDRIVE 4 LITE, XDRIVE 4 PRO

sales@abstract.co.uk www.abstract.co.uk

T: +44 (0)116 278 8078 Open Mon - Fri 8am - 5pm



